

Accu-Force[®] Spring Smasher

Championship Level Teams
require more performance
from their race cars, people
and equipment.


Accu-Force Spring Smashers are
designed for champions, leading
the industry in accuracy and
innovation.

Every Accu-Force Machine is
precision calibrated for accuracy
and guaranteed to be repeatable to
0.1%!


Fast and Accurate Manual Controls
on the Standard III for teams
looking for simplicity.

Precision Automated Controls on
the GEN 3 Automatic for teams
needing graphing, compression
& extension loads and precise
repeatability.

When Accuracy Counts,
Count on Accu-Force!

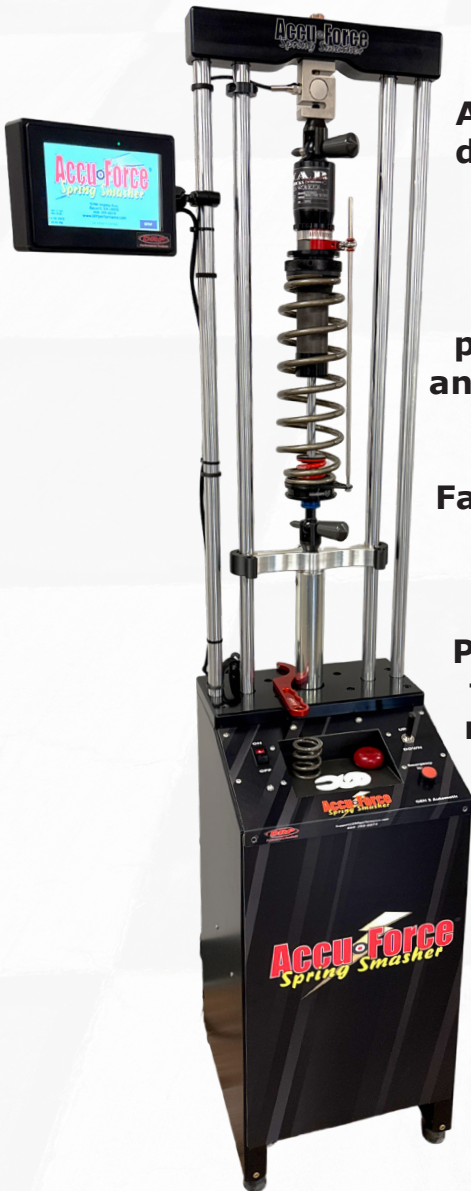

**GEN 3
Automatic**

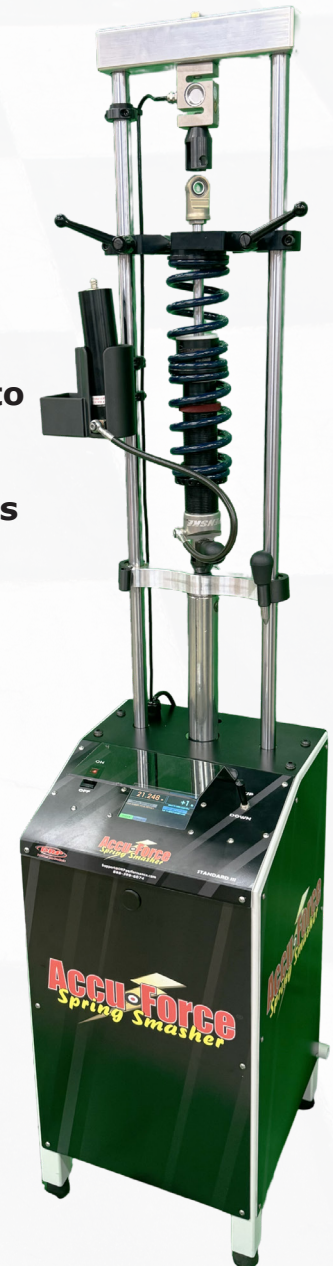

Standard III



Performance Products

Manufactured & Serviced
by DRP Performance
in Bassett, VA

New for '26

Accu-Force[®] Spring Smasher

GEN-3 Automatic

The fastest and most accurate way to change coil-over springs.

- Gen 3 Design for Maximum Accuracy
- Integrated Spring Unloader Eliminates Removing Shock to Change Spring.
- Extra Clearance when Unloading Springs.
- Canister Cup™ Quickly & Securely Holds Gas Canister.
- Wheel Kit for Portability.
- Pin Holders for Speed


Automated for Fast & Repeatable Tests
On Screen Graphing with Overlay
USB Download
Push & Pull Modes




• Adjustable Side Mount Control Screen

• Tool Tray

• Billet Shock Pins

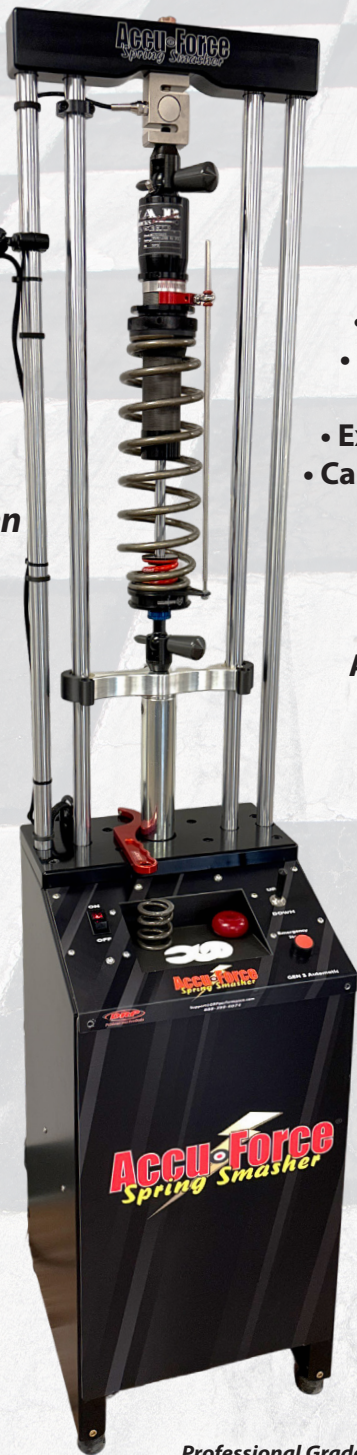

Main Screen Displays Center to Center & Spring Load.
Select Push or Pull Mode.
49 Test Pre-Sets. Store 199 Saved Tests.

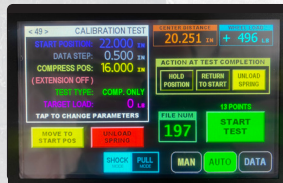

Overlay Graphs to Compare Tests.
Graph Compression & Rebound.



Manual Mode for Simple Manual Tests.
Quick Tap to Zero Load and Travel.



- AF3500 Accu-Force[®] Automated Spring Smasher - Base Model \$7495.00
- AF3550 Accu-Force[®] Automated Spring Smasher - Loaded \$7974.00
Loaded Model Includes Spring Unloader, Canister Cup & Wheel Kit.

Height	72"
Width	15"
Depth	15.5"
Max Shock Extension	30.25"
Min Shock Compression	12.25"
Max Travel	18"
Weight	145 lbs
Voltage	110v or 230v
Speed	.250"/Second
Shock Eyelet Size	1/2" or Custom
Max Load	4500lbs
Controls	Automatic or Manual Touchscreen



FINANCING AVAILABLE

Professional Grade Control
Fast, Automated Tests

100% Customer Satisfaction Guarantee
12 Month Warranty


4

888-399-6074 DRPperformance.net DRPuniversity.tv

Accu-Force[®] Spring Smasher

Standard III Spring Smasher

- Simple & Fast Touch Screen Displays Shock Centerline, Load & Travel
 - Tap Screen to Zero Weight or Travel
 - Electric Actuator with Toggle Switch Control
 - Extension Over-limit
- Optional Integrated Spring Unloader Eliminates Removing Shock to Change Spring.
 - Optional Wheel Kit for Portability.
 - Pin Holders for Speed

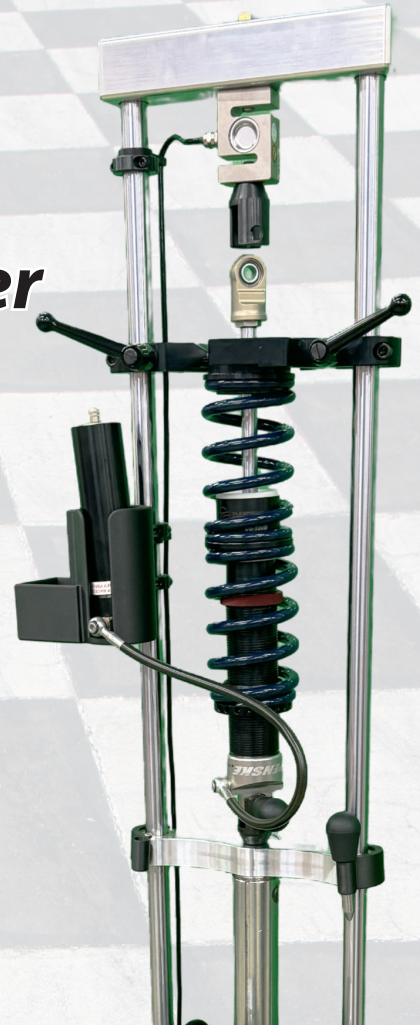

Main Touch Screen Displays Center to Center & Spring Load.



Quick Tap to Zero Load and Travel. Select Push or Pull Mode. (Push Mode Prevents over Extending Shock)

AF3100 Accu-Force[®] Standard III Spring Smasher
\$4194.00

The Standard III's greatest feature is its simplicity.

One Screen, Push or Pull Mode. Manual Toggle Control



FINANCING AVAILABLE

Height	71"
Width	15"
Depth	15.5"
Max Shock Extension	30.25"
Min Shock Compression	12.25"
Max Travel	18"
Weight	125 lbs
Voltage	110v or 230v
Speed	.250"/Second
Shock Eyelet Size	1/2" or Custom
Max Load	3500lbs
Controls	Manual Toggle with Touchscreen Display

Repeatable Set-Ups.
Improved Performance.

100% Customer Satisfaction Guarantee
12 Month Warranty



888-399-6074 DRPperformance.net DRPuniversity.tv

XL Spring Smashers



XL Manual Features:

- Measures Spring Load & Travel
- Precision Joystick Control
- Easy to Use Touchscreen Display
- High Speed Cylinder
- 5000# Max Load

XL Automatic Features:

- Automatically Loads, Records, Graphs and Unloads Spring
- Measures Spring Load & Travel
- Measure Low Speed Shock Valving & Adjustments
- Measures & Graphs Compression & Rebound
- Save Tests

- Set Spring Load, Lock Out Nuts, Bump Stops

- Check for Binds

- Store & Graph Data
- USB Data Download

- Match Shocks & Springs

- Remove & Replace Pre-Loaded Springs without adjusting Coil Over Nuts!

- UTV
- Side by Side
- Baja
- Trophy & Stadium Trucks

- 21" Stroke
- Your Choice of Shock Length. Up to 60" Shock Length Available!
- Manual or Fully

AF3600M
Accu-Force® XL Manual Spring Smasher
\$4695.00

Height	78.25"
Width	15"
Depth	15.5"
Max Shock Extension	*Custom*
Min Shock Compression	*Custom*
Max Travel	21"
Weight	145 lbs
Voltage	110v or 230v
Speed	.500"/Second
Shock Eyelet Size	1/2" or Custom
Max Load	5000lbs

100% Customer Satisfaction
Guarantee
12 Month Warranty



888-399-6074 DRPperformance.net DRPuniversity.tv

Spring Smasher Accessories



GEN-2 Swivel Unloader
Captures Spring
AF1920 \$303.00



One Piece Unloader
with Indicator Clearance
AF1910 \$303.00



Canister Cup
for Canister Style Shocks
AF1950 \$109.00



Spring Rate Adapters
AF1985 C/O \$157.00
AF1980 CONV \$241.00



Pull Bar & Trailing Arm
Adapter Kits
AF1958 5/8" \$149.00
AF1834 3/4" \$149.00



3 Piece Spring Unloader
Remove-able Plates
to Adjust Spring Size
AF1930 \$506.00



Wheel Kit
AF1800 \$79.00



New Billet Pins
AF1812 \$33.00

Specialty Adapters

- Quarter Midget Adapters
AF1860 \$142.00
- Drag Race Clevis'
AF1865 63.00
- Short Shock Extension
AF1870 \$63.00
- SXS/UTV Clevis'
AF1875 \$74.00





Bar Dyno

How do you know if your bar is what it's supposed to be?



- Torsion Bars
- Sway Bars
- Axles
- Automatically twists bar to Measure Bar Rate on the up and down stroke.
- Hysteresis
- Graphing
- Data Download
- Industrial Touch Screen
- 24"-37" Bar Length


Accu-Force™
Grip Measurement
Manufactured By: **DRP**
Performance Products



AF5000 Accu-Force® BAR DYNO \$7850.00
Specify: Torsion Bar, Sway Bar or Axle Adapters

TRAVEL	UP	DOWN	CHANGE
0.000	9	0	+9
0.125	76	83	+27
0.250	164	176	+28
0.375	213	186	+27
0.500	283	256	+27
0.625	333	327	+26
0.750	425	401	+24
0.875	496	473	+23
1.000	568	548	+22
1.125	640	619	+21
1.250	711	692	+19
1.375	783	767	+18
1.500	858	841	+15
1.625	929	917	+12
1.750	1002	997	+5

FILE NUM: 017
DESCRIPTION:
LAST RUN: 11/14/2018 12:46pm
SAVE DATA CLEAR FILE
USB GRAPH
MAN AUTO DATA

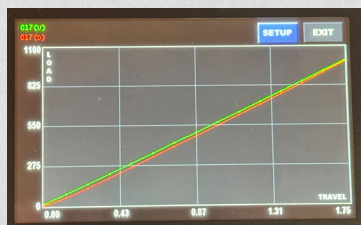

100% Customer Satisfaction Guarantee
12 Month Warranty

